

TOF Principle

NEW!



| | | |
|---|---|---------------------------------------|
| Appearance | | |
| Light source | Infrared laser(905nm) | |
| Laser safety level | Class 1 (GB7247.1-2012, Eye-safe IEC) | |
| Laser spot light diameter | 8mm | |
| Laser spot light scan angle | 12.5 mrad | |
| Scanning angle range | 300° | |
| Scanning frequency | 25Hz(system default)/12.5Hz/6.25Hz | |
| Scanning angle resolution | 0.5° (system default)/0.25° /0.125° | |
| Sensing range | 0.1m ~ 20m | 0.1m ~40m |
| 10% reflectivity range | 15m | 30m |
| Outdoor performance | Anti-dusty, Anti-sunlight | |
| Rain fog and smoke penetration | Supported | |
| Measurement error | System error (typical) | ± 5cm (1m~20m) ; ± 10cm (20m~40m) |
| | Statistical error (1σ) | ± 2cm (1m~20m) ; ± 4cm (20m~40m) |
| Built-in application Regional monitoring | Monitoring mode: Point number monitoring / target width monitoring / contour monitoring | |
| | Monitor signal level: Attention / warning / alarm | |
| | Number of regional groups: 16 groups, support self-learning background exclusion | |
| | Concurrent work area group number: 16 (max) | |
| Self-test equipment | Guide the network camera to monitor the target video positioning and tracking | |
| | Contents:Transparent cover dirt / block / high temperature / low temperature Output mode: Indicator + TCP packets | |
| Ethernet | Rate: 10/100 Mbps; Network protocol: TCP/IP; Function: Device configuration / measurement data output /monitor signal output | |
| I/O Input | Quantity: 4; Type: Switching level input; High level range: 10V~28V DC; Low level range: 0V~5V DC Preset function: Monitor area selection (0x0 - 0xF); Regional monitoring disarm / forced alarm, active level: high level | |
| I/O Output | Quantity: 4; Type: PNP switch output ; Output voltage: Supply voltage;Power on: OFF;Device ready (OUT), active state: pass (High level), zone detection signal output (OUT2/OUT3/OUT4) active state: configurable | |
| Indicator light | Quantity: 2; Definition: ERR (Device alarm: Fault/Abnormal ,Transparent cover dirty / block, high and low temperature, Dense fog); HTR (operation status indication: detection signal / self-learning) | |
| Front panel button | Quantity: 1; Definition: Shielded monitor signal output / start background self-learning / restart device | |
| Operating voltage | 10V~ 28V DC | |
| Power | 5W(measuring),3.6W@DC 12V/14.4W@DC 24V(heating) | |
| Outer covering protection rank(IP) | IP65(GB4208-2008) | |
| Insulation resistance | 1M Ω (GB16796-2009.5.4.4) | |
| Dielectric strength | 0.5KV(GB16796-2009.5.4.3) | |
| Weight | 0.6kg | |
| Dimension(L×W×H) | 83.5 × 85 × 104.9(mm) | |
| Electromagnetic compatibility (EMC) | Electrostatic discharge | 6KV (GB/T17626.2-2006, class 3) |
| | Fast bursts | 1KV (GB/T17626.4-2008, class 2) |
| | Electromagnetic field radiation immunity | GB/T17626.3-2006, class 2 |
| Surge immunity | GB / T17626.5-2008 Power interface: 1.2 / 50 μs, 2KV / 1KA (Class 3) Ethernet interface: 10 / 700 μs, 1KV / 25A (Class 2); I / O interface: 1.5 / 50 μs, 0.5KV / 0.25KA (Class 1) | |
| Impact | GB/T 2423.5 | |
| Single impact | 15g, 11ms | |
| Continuous impact | 10g, 16ms | |
| Vibration | GB/T 2423.10 | |
| Frequency Range | 10Hz~ 150Hz | |
| Amplitude | 5g | |
| Humidity | 93%, +40°C, 2h (GB/T 2423.3) | |
| Operating temperature range | -25°C~+50°C | |
| Storage temperature range | -30°C~+70°C | |
| Ambient illumination range | ≤70,000lux | |
| Model NO. | AS-21C | AS-41C |

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area**
- Ultrasonic
- Vibration
- Temperature
- Cables
- Tester

Guidance

Light curtains


- Standard type
- Top-emitting type
- Side-emitting type
- Waterproof type
- Measuring type
- Economical type

Safety Light Curtain

- Beam pitch 10mm
- Beam pitch 20mm
- Beam pitch 30mm
- Beam pitch 40mm

LiDAR scanner

- TOF LiDAR scanner
- MINI LiDAR scanner
- Navigation LiDAR

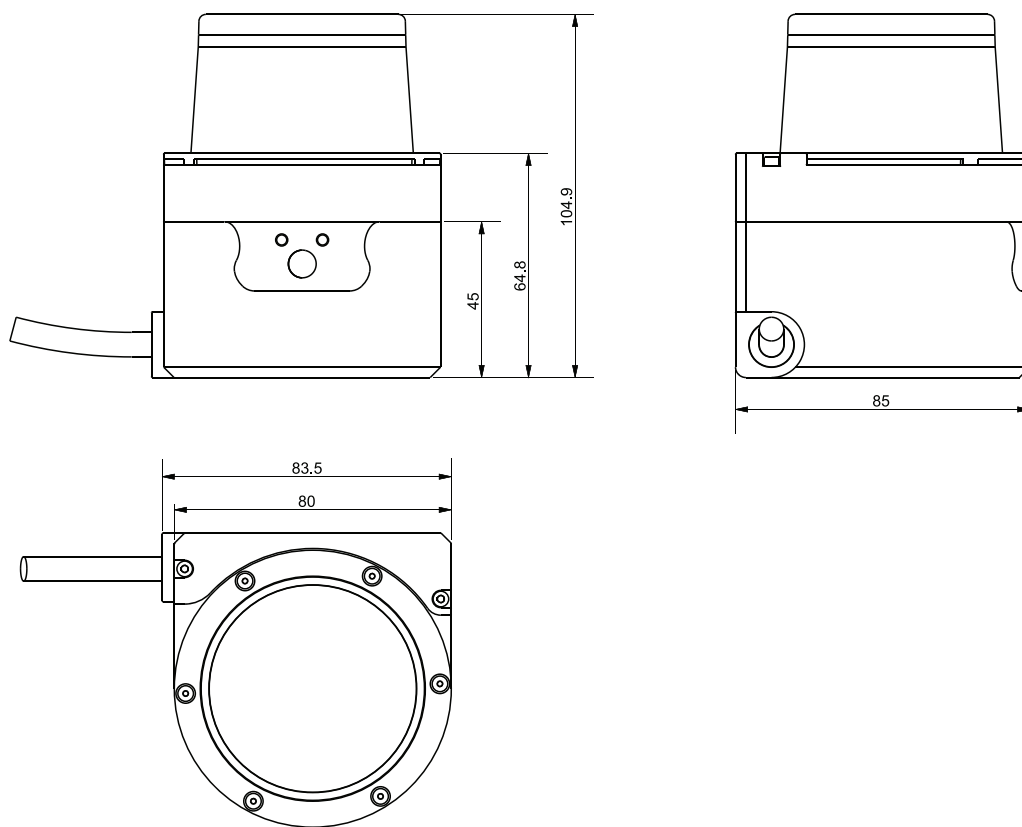





Power Interface

| | | Socket | Type | Explanation |
|--------------|--|----------|-------------|--------------|
| I/O | | DC002 | Power | Female 2 pin |
| Power | | Ethernet | RJ45 socket | 4 pin |
| Network port | | I/O | Cable | 10 pin |

Accessories

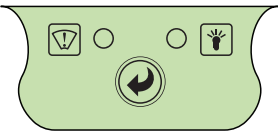
| | | | |
|--|--------------------------------------|---|--|
| | | | Mounting screws, gasket and easy installation tool |
| Composite Bracket: AS-21C-AT 1 Piece | Power Cable: AS-21C-EC 1 Strip | Crystal Protective Cover: AS-21C-WJ 1 Piece | Accessories: M4x8 1 Set |

| | Name | Instructions |
|---|---|--|
|  |  ERR | Work fault indicator ◆ Startup state: Light on(About 27s)Always off: No fault ◆ Always on:Internal fault ◆ Always on: Internal fault,Abnormal measurement ◆ Long flicker (0.25Hz) : High / low temperature alarm ◆ Short flicker(1Hz) : Transmissive cover is dirty/occluded ¹ |
| |  HTR | Work status indicator ◆ Startup state: Off ◆ Off: The device does not start measuring/ready to restart ◆ Always on:Equipment normal measurement ◆ Flash1 (0.5Hz) : Monitor Signal output ◆ Flash2 (1Hz) : Self-learning ² ◆ Flash3 (2.5Hz) : Ready to start self-learning ² |
| |  SLR | Operation button ◆short press (1s~5s)Start background self-learning ◆Long press(≥ 6s) : Delete background |


1:Including being blocked by dense fog or the detection area being blocked.
 2:Including "background self-learning" and "normal goal self-learning"(customized function).

Measuring coordinate system/scan range/range

AS-21C

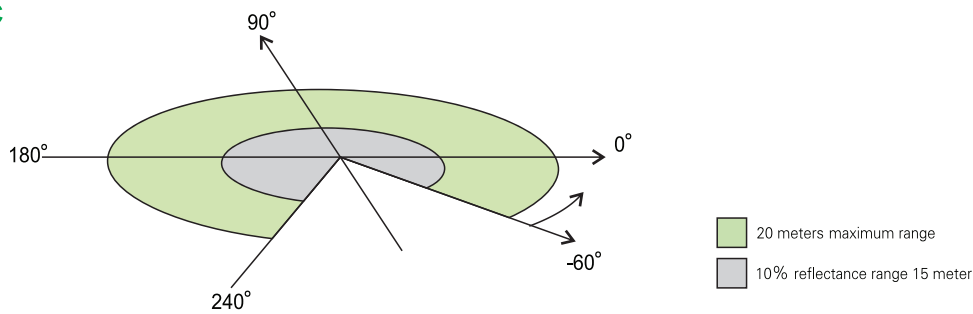

AS-41C

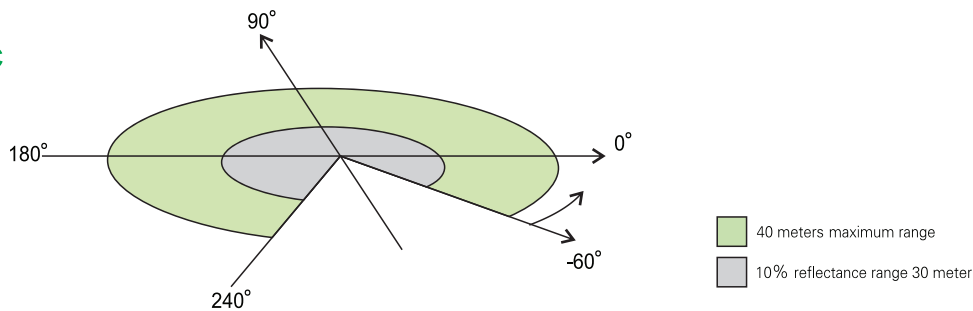

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area**
- Ultrasonic
- Vibration
- Temperature
- Cables
- Tester

Guidance

Light curtains

- Standard type
- Top-emitting type
- Side-emitting type
- Waterproof type
- Measuring type
- Economical type

Safety Light Curtain

- Beam pitch 10mm
- Beam pitch 20mm
- Beam pitch 30mm
- Beam pitch 40mm

LIDAR scanner

- TOF LIDAR scanner**
- MINI LIDAR scanner
- Navigation LIDAR

TOF principle



Appearance

| | | |
|-------------------------------------|--|-----------------------------------|
| Light source | Infrared laser(905nm) | |
| Laser safety level | Class1(GB7247.1-2012, Eye-safe IEC) | |
| Laser spot light diameter | 10mm | |
| Laser spot light scan angle | 10.0(H) 2.0(V)mrad | |
| Scanning angle range | 360° | |
| Scanning frequency | 12.5Hz | |
| Scanning angle resolution | 0.5° | |
| Sensing range | 0.1m ~20m | |
| 10% reflectivity range | 15m | |
| Outdoor performance | Indoor, anti - light, anti - dirt | |
| Rain fog and smoke penetration | Support | |
| Measurement error | System error (typical) Statistical error (1σ) | |
| | ± 5cm (1m~15m) ± 2cm (1m~15m) | |
| | Monitoring mode: point number monitoring / target width monitoring / contour monitoring | |
| Built-in application | Monitoring signal type: attention / warning / alarm | |
| Regional monitoring | Number of regional groups: 16 groups Number of concurrent work area groups: 16 (max) | |
| | Can detect targets of any shape, support normal target self-learning function | |
| Self-test equipment | Contents: Dirty cover / blocking / high temperature / low temperature; output method: indicator + TCP message | |
| Ethernet | Rate: 10/100 Mbps; network protocol: TCP / IP; function: device configuration / measurement data output / monitor signal output | |
| I/O Input | Quantity: 4; Type: Level input; High level range: 10V~28V DC; Low level range: 0V~5V DC; Preset function: monitoring area selection (0x0 - 0xF); area monitoring disarm / force alarm, effective level: high level; | |
| I/O Output | Quantity: 4; Type: PNP switch output; Output voltage: power supply voltage; Power-on state: off; Device ready (OUT), valid state: on, zone detection signal output (OUT2 / OUT3 / OUT4) valid state: configurable | |
| Indicator light | Quantity: 2; Definition: ERR (equipment alarm: failure / abnormality, dirty / transparent cover, high and low temperature, dense fog); HTR (operation status indication: detection signal / self-learning) | |
| Operating voltage | 12V~28V DC | |
| Power | 4.5W@DC 24V | |
| Outer covering protection rank(IP) | IP65(GB4208-2008) | |
| Insulation resistance | 1M Ω (GB16796-2009.5.4.4) | |
| Dielectric strength | 0.5KV(GB16796-2009.5.4.3) | |
| Weight | 0.5kg | |
| Dimension(L×W×H) | 86.0 × 85.0 × 59.5(mm) | |
| Electromagnetic compatibility (EMC) | Electrostatic discharge | 6KV (GB/T17626.2-2006, Class 3) |
| | Fast bursts | 1KV (GB/T17626.4-2008, Class 2) |
| | Electromagnetic field radiation immunity | GB/T17626.3-2006, Class 2 |
| Surge immunity | GB/T17626.5-2008; Power interface: 1.2/50 μs, 2KV/1KA (Class 3) ; Ethernet interface: 10/700 μs, 1KV/25A (Class 2) ; I/O interface: 1.5/50 μs, 0.5KV/0.25KA (Class 1) ; | |
| Impact | GB/T 2423.5 | |
| Single impact | 15g, 11ms | |
| Continuous impact | 10g, 16ms | |
| Vibration | GB/T 2423.10 | |
| Frequency Range | 10Hz~150Hz | |
| Amplitude | 5g | |
| Humidity | 93%, +40°C, 2h (GB/T 2423.3) | |
| Operating temperature range | -10°C~+45°C | |
| Storage temperature range | -30°C~+70°C | |
| Ambient illumination range | ≤70,000lux | |
| Model NO. | AS-11C | |

Area

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vibration

Temperature

Cables

Tester

Guidance

Light curtains

Standard type

Top-emitting type

Side-emitting type

Waterproof type

Measuring type

Economical type

Safety Light Curtain

Beam pitch 10mm

Beam pitch 20mm

Beam pitch 30mm

Beam pitch 40mm

LiDAR scanner


TOF LiDAR scanner

MINI LiDAR scanner

Navigation LiDAR

Dimensions

Unit:mm

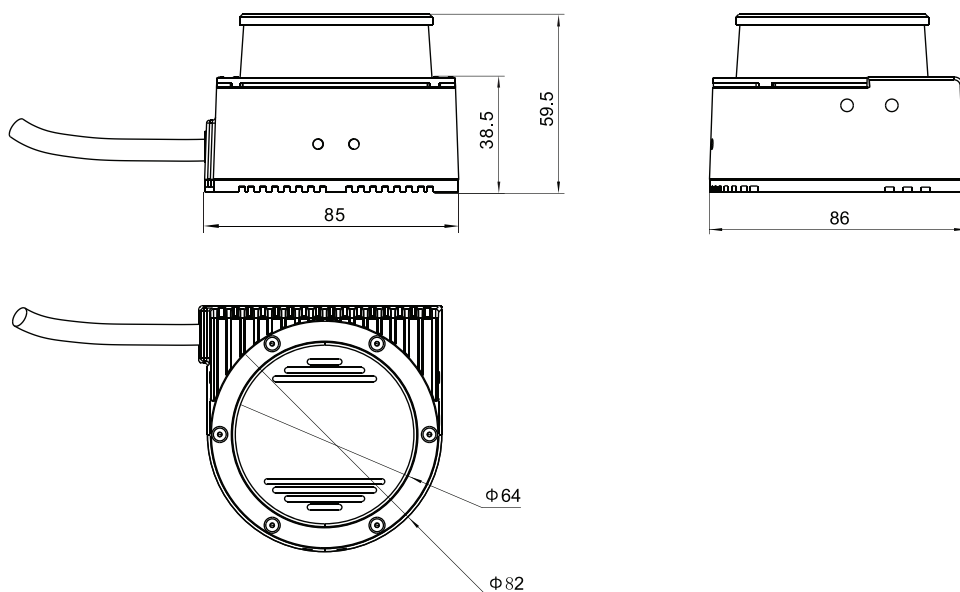

Power Interface

| | Socket | Type | Explanation |
|--------------|----------|-------------|--------------|
| I/O | | | |
| Power | DC002 | Power | Female 2 pin |
| Network port | Ethernet | RJ45 socket | 4 pin |
| | I/O | Cable | 9 pin |

Accessories

| | | | |
|---------------------------|----------------------------|---|--|
| | | | Mounting screws, gasket and easy installation tool |
| Side bracket: A AS-11C-AT | Cable:A piece of AS-11C-EC | Network cable crystal head waterproof jacket: A AS-11C-WJ | |
| | | | Accessories:A set of M4x8 |

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vibration
- Temperature
- Cables
- Tester

Guidance

Light curtains

- Standard type
- Top-emitting type
- Side-emitting type
- Waterproof type
- Measuring type
- Economical type
- Safety Light Curtain
- Beam pitch 10mm
- Beam pitch 20mm
- Beam pitch 30mm
- Beam pitch 40mm




LiDAR scanner

- TOF LiDAR scanner
- MINI LiDAR scanner
- Navigation LiDAR

LiDAR Scanner


Indicators and Operation Buttons

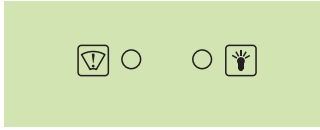Area

|  | Name | Instructions |
|---|--|---|
| |  ERR | Work fault indicator <ul style="list-style-type: none"> ◆ Startup status: bright (About 27s) ◆ Off: No fault ◆ Steady light: Internal fault ◆ Long flicker (0.5 Hz): High temperature / low temperature alarm ◆ Short flicker (1Hz): Transmissive cover is dirty/occluded¹ |
| |  HTR | Work status indicator <ul style="list-style-type: none"> ◆ Startup state: off ◆ Off: The device does not start measurement/ready to reboot ◆ Bright: Normal measurement of equipment ◆ Flashing 1 (0.5Hz): Monitor signal output ◆ Flashing 2 (1Hz): Self-learning² ◆ Flashing 3 (2.5Hz) : Ready for self-learning² |

1: Including being blocked by dense fog or the detection area being blocked.
 2: Including "background self-learning" and "normal goal self-learning"(customized function).

Measuring coordinate system/scan range/range

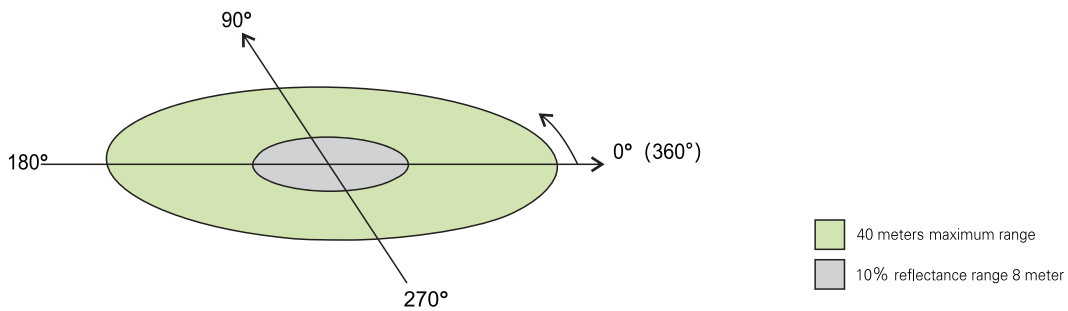

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vibration

Temperature

Cables

Tester

Guidance

Light curtains

Standard type

Top-emitting type

Side-emitting type

Waterproof type

Measuring type

Economical type

Safety Light Curtain

Beam pitch 10mm

Beam pitch 20mm

Beam pitch 30mm

Beam pitch 40mm

LIDAR scanner

TOF LIDAR scanner

MINI LIDAR scanner

Navigation LIDAR

TOF principle

NEW!



| | | |
|-------------------------------------|--|--|
| Appearance | | |
| Light source | Infrared laser (905nm) | |
| Laser safety level | Class I (GB7247.1-2012, human eye safety) | |
| Laser spot light diameter | 10mm | |
| Laser spot light scan angle | 2.0(H)×8.0(V)mrad | |
| Scanning angle range | 360° | |
| Scanning frequency | 10Hz/20Hz | |
| Scanning angle resolution | 0.05° /0.1° | |
| Sensing range | 0.2m ~ 100m | |
| RSSI Measurement Range | 3% ~ 1000% (reflector) | |
| 10% reflectivity range | 20m | |
| Outdoor performance | Anti-sunlight, anti-dirt, support smoke penetration, use under non-rainfall conditio | |
| Measurement data | Composite data (distance + RSSI) | |
| Measurement error | System error (typical) | Distance measurement: 25mm(1m~20m) / 40mm(20m~50m); RSSI measurement: 2%(1m~20m) / 4%(20m~50m) |
| | Statistical error (1σ) | Distance measurement: 10mm(1m~20m) / 20mm(20m~50m); RSSI measurement: 1%(1m~20m) / 2%(20m~50m) |
| Self-test equipment | Content: Dirty/blocking/high temperature/low temperature of the translucent cove | |
| Ethernet | Rate: 10/100 Mbps; function: device configuration/measurement data output | |
| I/O Input | Quantity: 3; Type: level input (vs. general input common ground "GND IN"); high level range: 9V ~ 30V DC; low level range: 0V~0.7V DC; Preset function: power saving and life extension control (In2 / In3), effective level: high lev | |
| I/O Output | Quantity: 3; Type: PNP switch output (vs. power supply positive terminal); Power-on state: off; Preset function: equipment on Thread (OUT), effective state: op | |
| Indicator light | Quantity: 4; Definition: PWR: power indicator; LNK: Ethernet indicator; ERR: working failure indicator; HTR: normal measurement indicator | |
| Operating voltage | 9V~30V DC | |
| Power | 5W@DC 24V | |
| Outer covering protection rank(IP) | IP65(GB4208-2008) | |
| Insulation resistance | 1MΩ (GB16796-2009.5.4.4) | |
| Dielectric strength | 0.5KV(GB16796-2009.5.4.3) | |
| Weight | 0.7kg | |
| Dimension(L×W×H) | 97.0 × 97.0 × 72.0(mm) | |
| Electromagnetic compatibility (EMC) | Electrostatic discharge | 6KV (GB/T17626.2-2006, Class 3) |
| | Fast bursts | 1KV (GB/T17626.4-2008, Class 2) |
| | Electromagnetic field radiation immunity | GB/T17626.3-2006, Class 2 |
| Surge immunity | GB/T17626.5-2008; Power interface: 1.2/50μs, 2KV/1KA (Class 3) ; Ethernet interface: 10/700μs, 1KV/25A (Class 2) ; I/O interface: 1.5/50μs, 0.5KV/0.25KA (Class 1) ; | |
| Impact | GB/T 2423.5 | |
| Single impact | 15g, 11ms | |
| Continuous impact | 10g, 16ms | |
| Vibration | GB/T 2423.10 | |
| Frequency Range | 10Hz~150Hz | |
| Amplitude | 5g | |
| Humidity | 93% , +40°C, 2h (GB/T 2423.3) | |
| Operating temperature range | -10°C~+50°C | |
| Storage temperature range | -30°C~+70°C | |
| Ambient illumination range | ≤80,000lux | |
| Model NO. | AS-100C | |

| |
|---------------|
| Fiber Optic |
| Slot Sensors |
| Photoelectric |
| Laser |
| Proximity |
| Displacement |
| Magnetic |
| Contact |
| Area |
| Ultrasonic |
| Vibration |
| Temperature |
| Cables |
| Tester |

Guidance

| |
|----------------------|
| Light curtains |
| Standard type |
| Top-emitting type |
| Side-emitting type |
| Waterproof type |
| Measuring type |
| Economical type |
| Safety Light Curtain |
| Beam pitch 10mm |
| Beam pitch 20mm |
| Beam pitch 30mm |
| Beam pitch 40mm |


| |
|--------------------|
| LIDAR scanner |
| TOF LIDAR scanner |
| MINI LIDAR scanner |
| Navigation LIDAR |

LiDAR Scanner


Dimensions

Unit:mm

Area

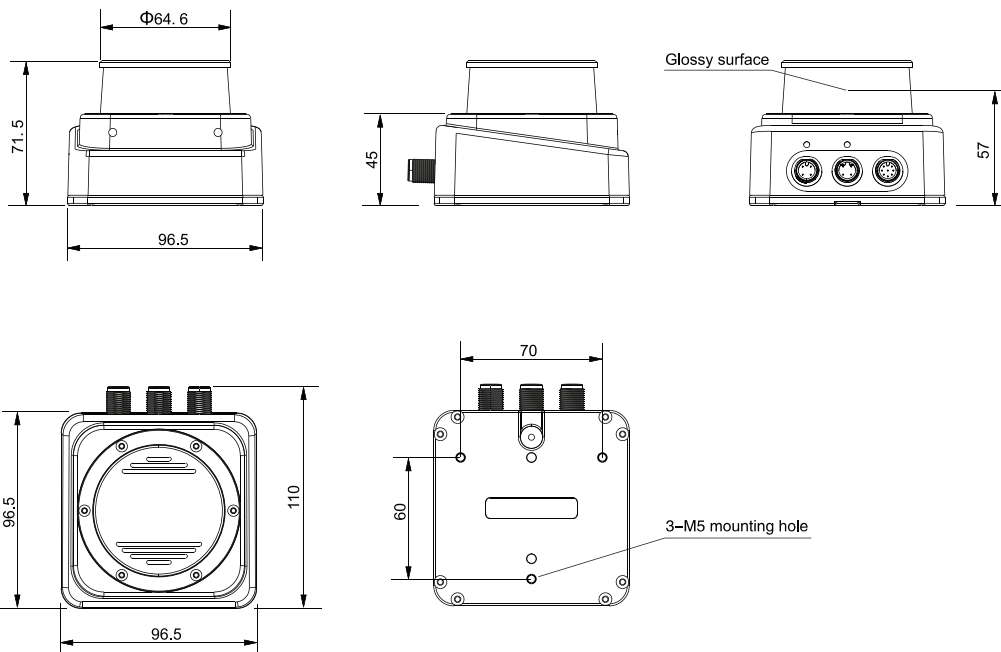


Power connector

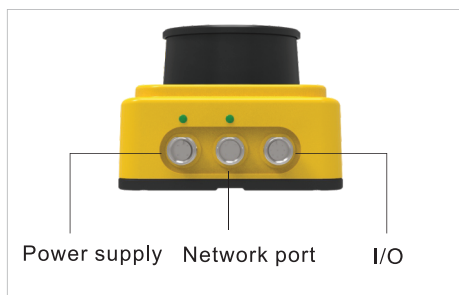


| Socket | Types | Number of terminal |
|--------------|-------------------|--------------------|
| Power supply | M12(Type A), Male | 4 |
| Etherne | M12(Type B), Male | 4 |
| I/O | M12(Type B), Male | 8 |

Measuring coordinate system/scanning range/range

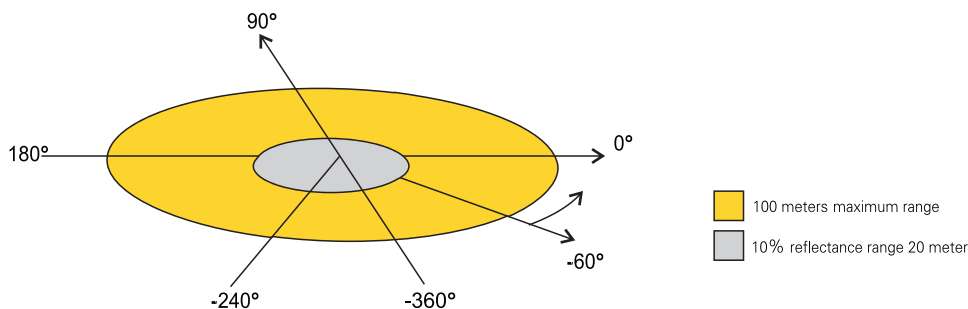

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area**
- Ultrasonic
- Vibration
- Temperature
- Cables
- Tester
- Guidance
- Light curtains
 - Standard type
 - Top-emitting type
 - Side-emitting type
 - Waterproof type
 - Measuring type
 - Economical type
- Safety Light Curtain
 - Beam pitch 10mm
 - Beam pitch 20mm
 - Beam pitch 30mm
 - Beam pitch 40mm
- LIDAR scanner
 - TOF LIDAR scanner
 - MINI LIDAR scanner
 - Navigation LIDAR**




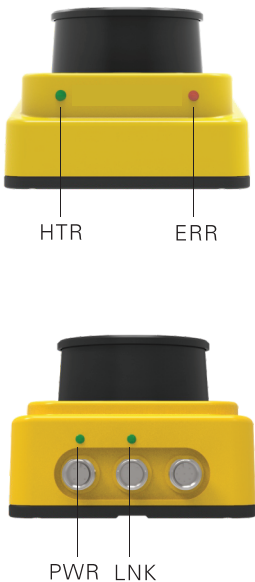

Indicator Lights and Operation Buttons

| | Name | Description |
|---|------|---|
|  | PWR | Power Indicator <ul style="list-style-type: none"> ◆ Normal off: no power / power is invalid ◆ Constant light: power on |
| | LNK | Ethernet indicator <ul style="list-style-type: none"> ◆ Always off: no network connection ◆ Always on: there is a network connection |
| | ERR | Work failure indicator <ul style="list-style-type: none"> ◆ Starting state: bright (about 24 seconds) ◆ Always off: no fault ◆ Always on: internal fault/measurement abnormal¹ ◆ Long flashing (0.5Hz): high temperature/low temperature alarm ◆ Short flashing (1Hz): Dirty/obstructed light transmission cover |
| | HTR | Normal measurement indicator <ul style="list-style-type: none"> ◆ Starting state: off ◆ Always off: the device has not started to measure ◆ Always on: the equipment is measuring normally |

1: Including measurement stop and motor stop;

2: Including being blocked by dense fog.

Accessories

| | | | | | |
|---|---|---|---|---|---|
|  |  |  |  |  | Mounting screws, washers And easy installation tools |
| Mounting bracket: AS-100C-AT set | M12 dust plug Comes with | Power cable: AS-100C-ECA | RJ45 network cable: AS-100C-IOCB A | I/O cable: AS-100C-IOCB A | Parts and accessories: M5x8 set |

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vibration

Temperature

Cables

Tester

Guidance

Light curtains

Standard type

Top-emitting type

Side-emitting type

Waterproof type

Measuring type

Economical type

Safety Light Curtain

Beam pitch 10mm

Beam pitch 20mm

Beam pitch 30mm

Beam pitch 40mm

LIDAR scanner

TOF LIDAR scanner

MINI LIDAR scanner